

DirectTex® Artist Mambo®

Fields of application

.02 .04 .05 .07

Specifications



564160 137



100 % polyester
weave fabrics
PVC-free, recyclable



ca. 160/ 252/ 320/ 505 cm
ca. 63/ 99/ 126/ 199 inch
other widths available on request



B-s1, d0 DIN EN 13501-1
NFPA 701



ca. 170 g/m²
ca. 5.0 oz/yd²



ca. 0.25 mm
ca. 250 µm



rolls
50/ 100 m
55/ 109 yd



coated side: 7
uncoated side: 6-7
DIN EN ISO 105-B02



warp: 1314.1 N
weft: 1238.6 N
DIN EN ISO 13934-1



warp: 27.9 %
weft: 32.6 %
DIN EN ISO 13934-1



warp: 0.8 %
weft: 1.6 %
DIN EN 14704-1



indirect, direct light



cold, heat, ultrasonic cut

Printing methods

print	UV	Latex	Dyesub	UVgel
Inside	•			
Outside			•	

Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	0,7 %	1,5 %	•
190°C	0,8 %	1,8 %	
200°C	1,2 %	2,7 %	
210°C	1,3 %	2,8 %	


Certifications



DirectTex® Artist Mambo®

Fields of application

.02 .04 .05 .07

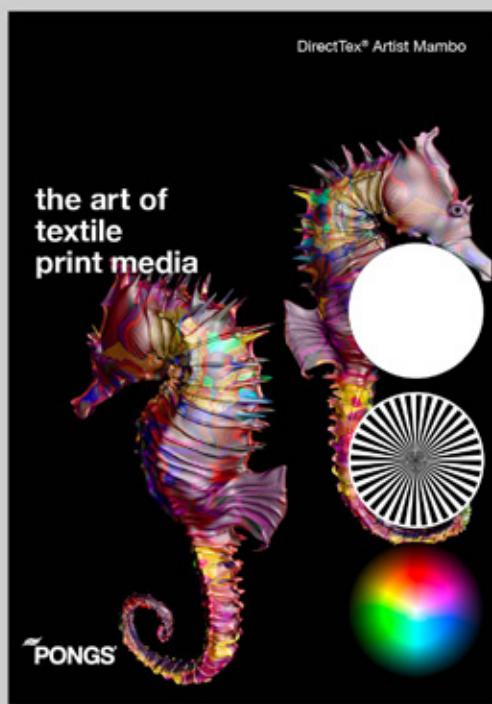

Ref.-Nr.: 564160 137 | Preview print sample